

PERFORMANCE PC 710

7x10" Performance Coaxial Kit




- Polyglass cone
- 90mm magnet
- Adjustable inverted dome tweeter

SPECIFICATIONS

Nominal power	100 RMS	
Maximum power	200 RMS	
Sensitivity (2,83V/1m)	94dB	
Cone	Polyglass	
Surround	Butyl	
Nom. impedance	4 Ohms	
DC resistance	3.2 Ohms	
VC diameter	30.5mm	1"
VC height	10.5mm	0 ⁵ / ₁₆ "
Former	Kapton	
Layers	2	
Wire	Copper	
Inductance	0.16mH	
Xmax	2.75mm	0 ¹ / ₁₆ "
Magnet d x h	90mm x 17mm	-
Magnet weight	320gr	-
Flux density		
Gap height	53mm	0 ¹ / ₈ "
Net weight	125g	0.50 lb

FREQUENCY RESPONSE/IMPEDANCE

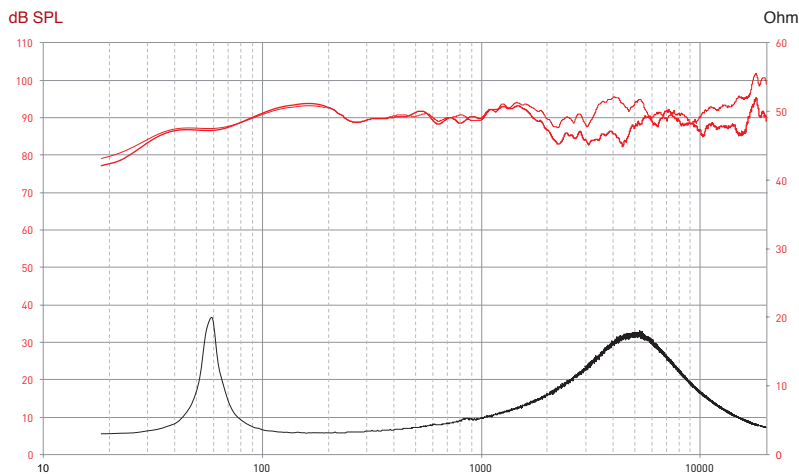

PARAMETERS

Fs	54.33Hz
Vas	26.8 l
Qts	0.64
Qes	0.69
Qms	7.9
Re	3.28 Ohms
Sd	206.0cm ²
Cas	1.82 E-07m ⁵ /N
Mas	47.2kg/m ⁴
Ras	2039.44 Ohms.ac
Cms	450µ/N
Mms	19.08g
Rms	0.824kg/s
Ces	616.25mF
Les	13.93mH
Res	37.55 Ohms
BI	5.56N/A
SPL	89.7 dB/W/m

MECHANICAL DRAWING

